



DIY Acrylic PC case USER MANUAL

## Step 1 Peeling Off

we have two choice of the base color, transparent and black ones.  
they are installed in the same way.



# Checking the screws




- 1, longer for cover panel, shorter for pillars.
- 2, mother board.
- 3, POWER, Hard Disk.
- 4, Motherboard.
- 5, DVD Driver and flap.
- 6, Graphy card.
- 7, Square Pillars top and bottom.
- 8, Motherboard, SSD.
- 9, Fan.
- 10, Square Pillar right and left.



use No.7 screws.


A black metal chassis is shown from a top-down perspective. A power foot, which is a small black cylindrical component with a central hole, is being installed into a pre-drilled hole on the chassis. A yellow hand-drawn circle and arrow highlight the power foot and its location. The chassis has several other holes and slots. In the background, a wooden workbench and a clear plastic bag containing small parts are visible.

Install the Power foot, use No.6 screw

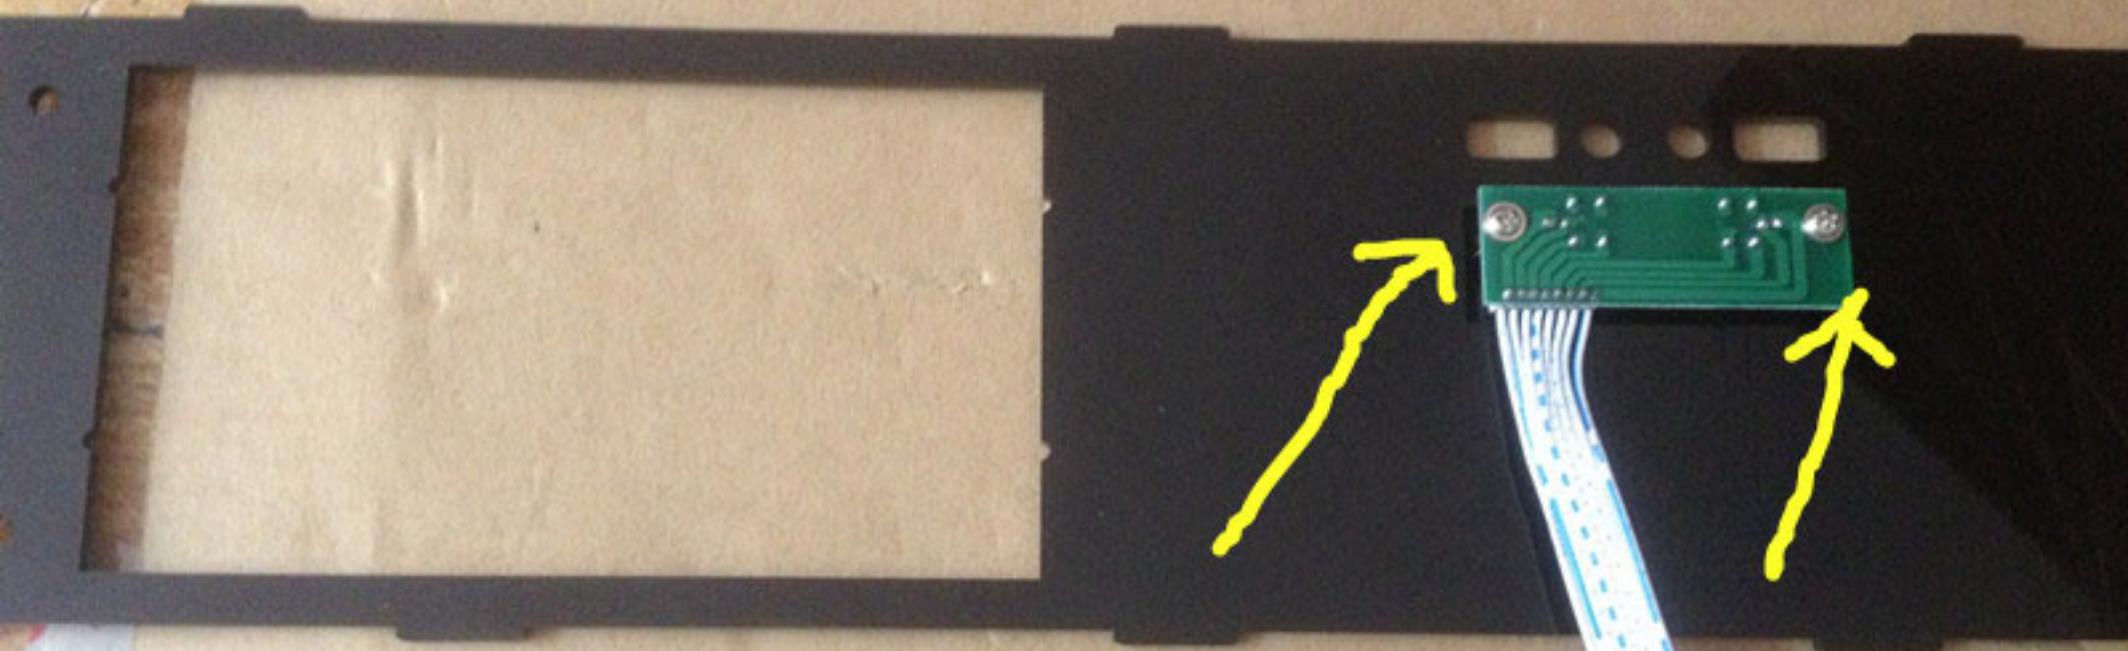


Fix on the front USB panel

For the 8cm Fan

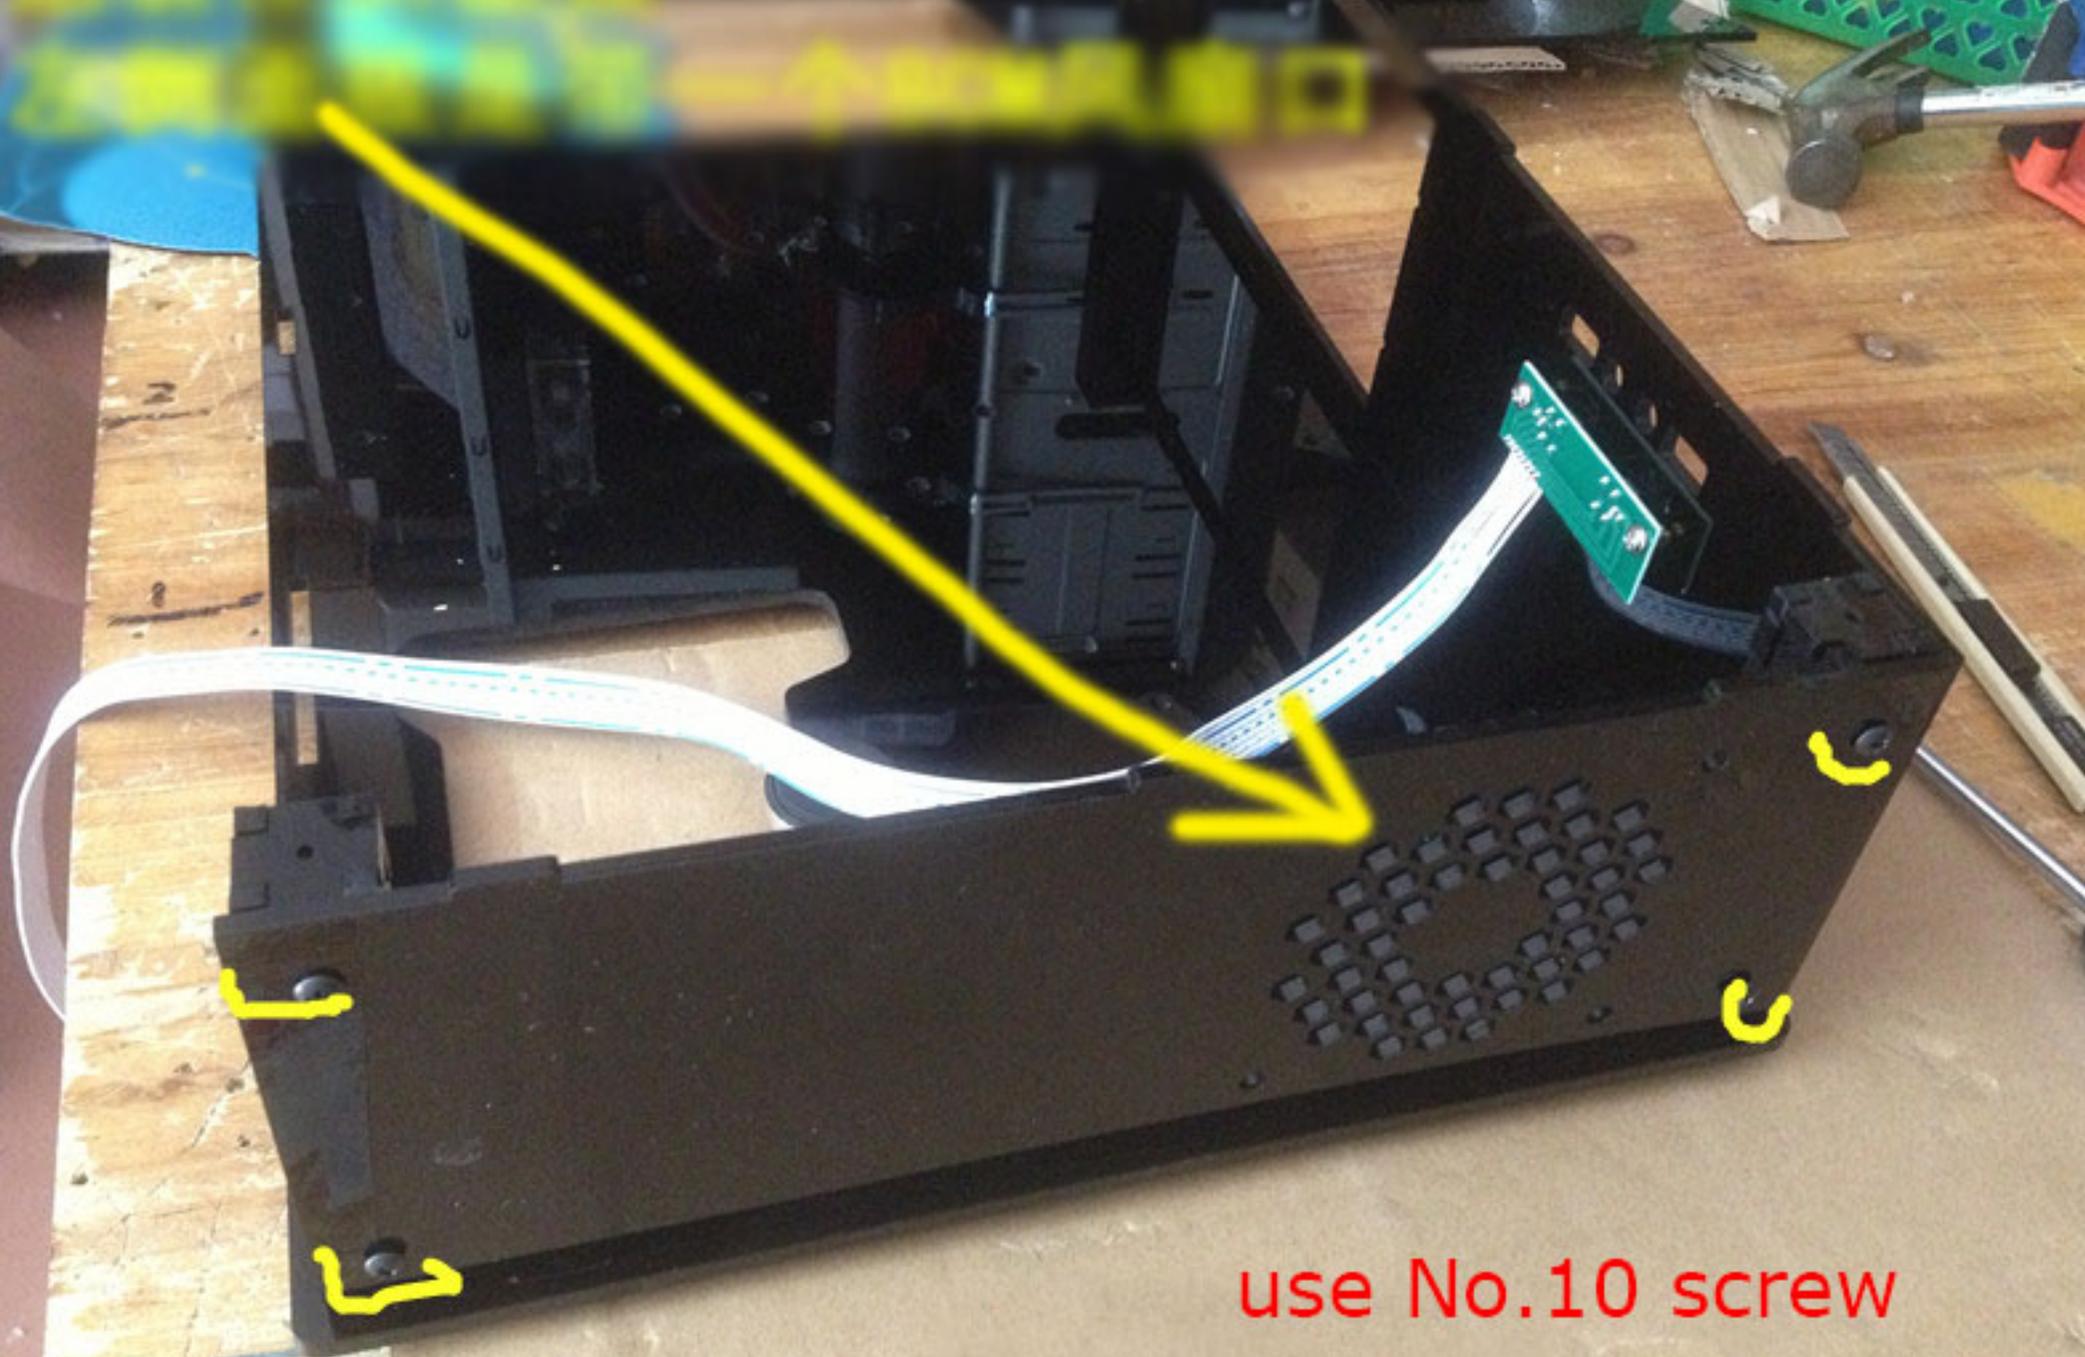

use No.10 screw

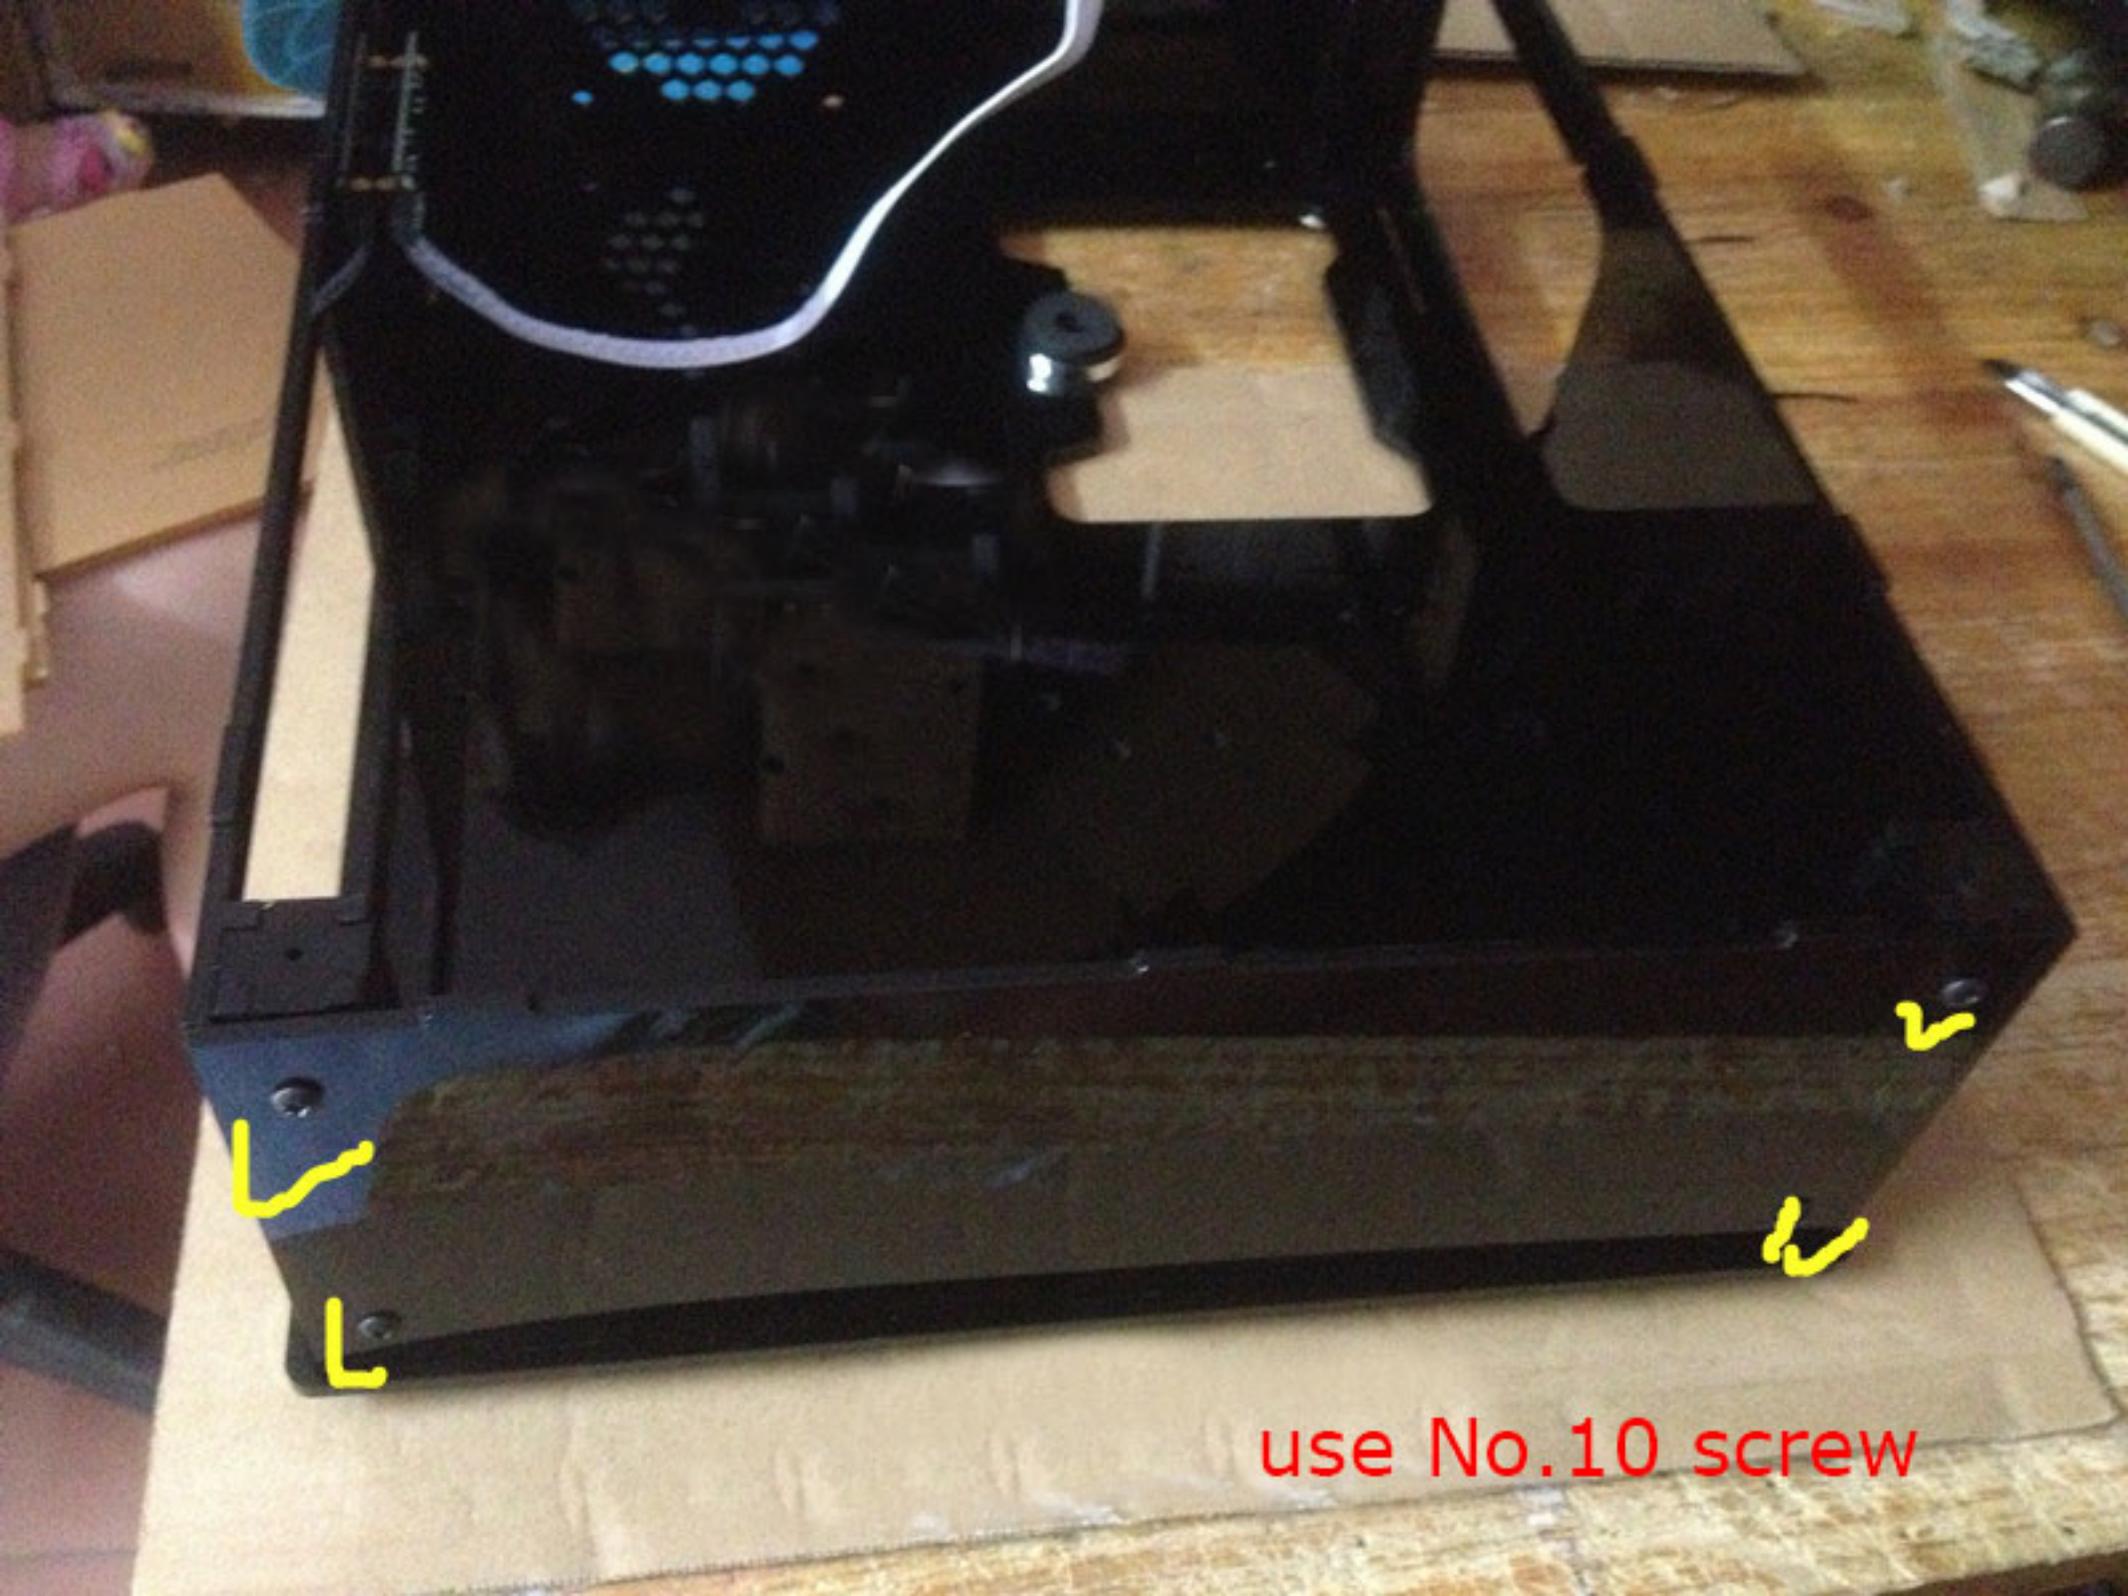

use No.10 screw

A black electronic device is shown on a wooden surface. A fan is mounted on the side of the device, with four yellow arrows pointing to its mounting holes. A green printed circuit board (PCB) is visible inside the device, connected to a white ribbon cable. Another white ribbon cable is connected to the top of the device. A red wire is also visible. The device is mounted on a wooden surface, and a cardboard box is partially visible in the background.

flow to the label side

use No.9 screw



HITACHI www.hitachi.com  
 JUN-2010  
 0115501JPT3LA0026  
 P/N 0710381  
 CAPACITY 500GB P.L.C. DT15EA  
 LBA 978,772,158 HITACHI G10484 E180215 ON  
 MADE IN CHINA BY HITACHI G10484  
 Storage Products Division Co., Ltd. ON  
 RATED 5V 4.50mA 1.2V 700mA SATA 3.0 Gb/s  
 H08721850CLAN02 8PM T055KPM  
 C P/N 83006818725  
 T/W 010142188

WARRANTY VOID IF ANY LABEL  
 SCREW IS REMOVED OR BEHIND

PA Y A CE 2 E  
 DC 100V  
 470VAC/50/60Hz

HD  
 ← cable



No. 3 Screws

The Power this side up



No. 3 screw

AC220/50HZ





No. 5 Screws

this side in front

No. 5 Screws\*3






Remove the foot before screwing.


No. 5 screws




Install the middle panel.

Attention, this side up.

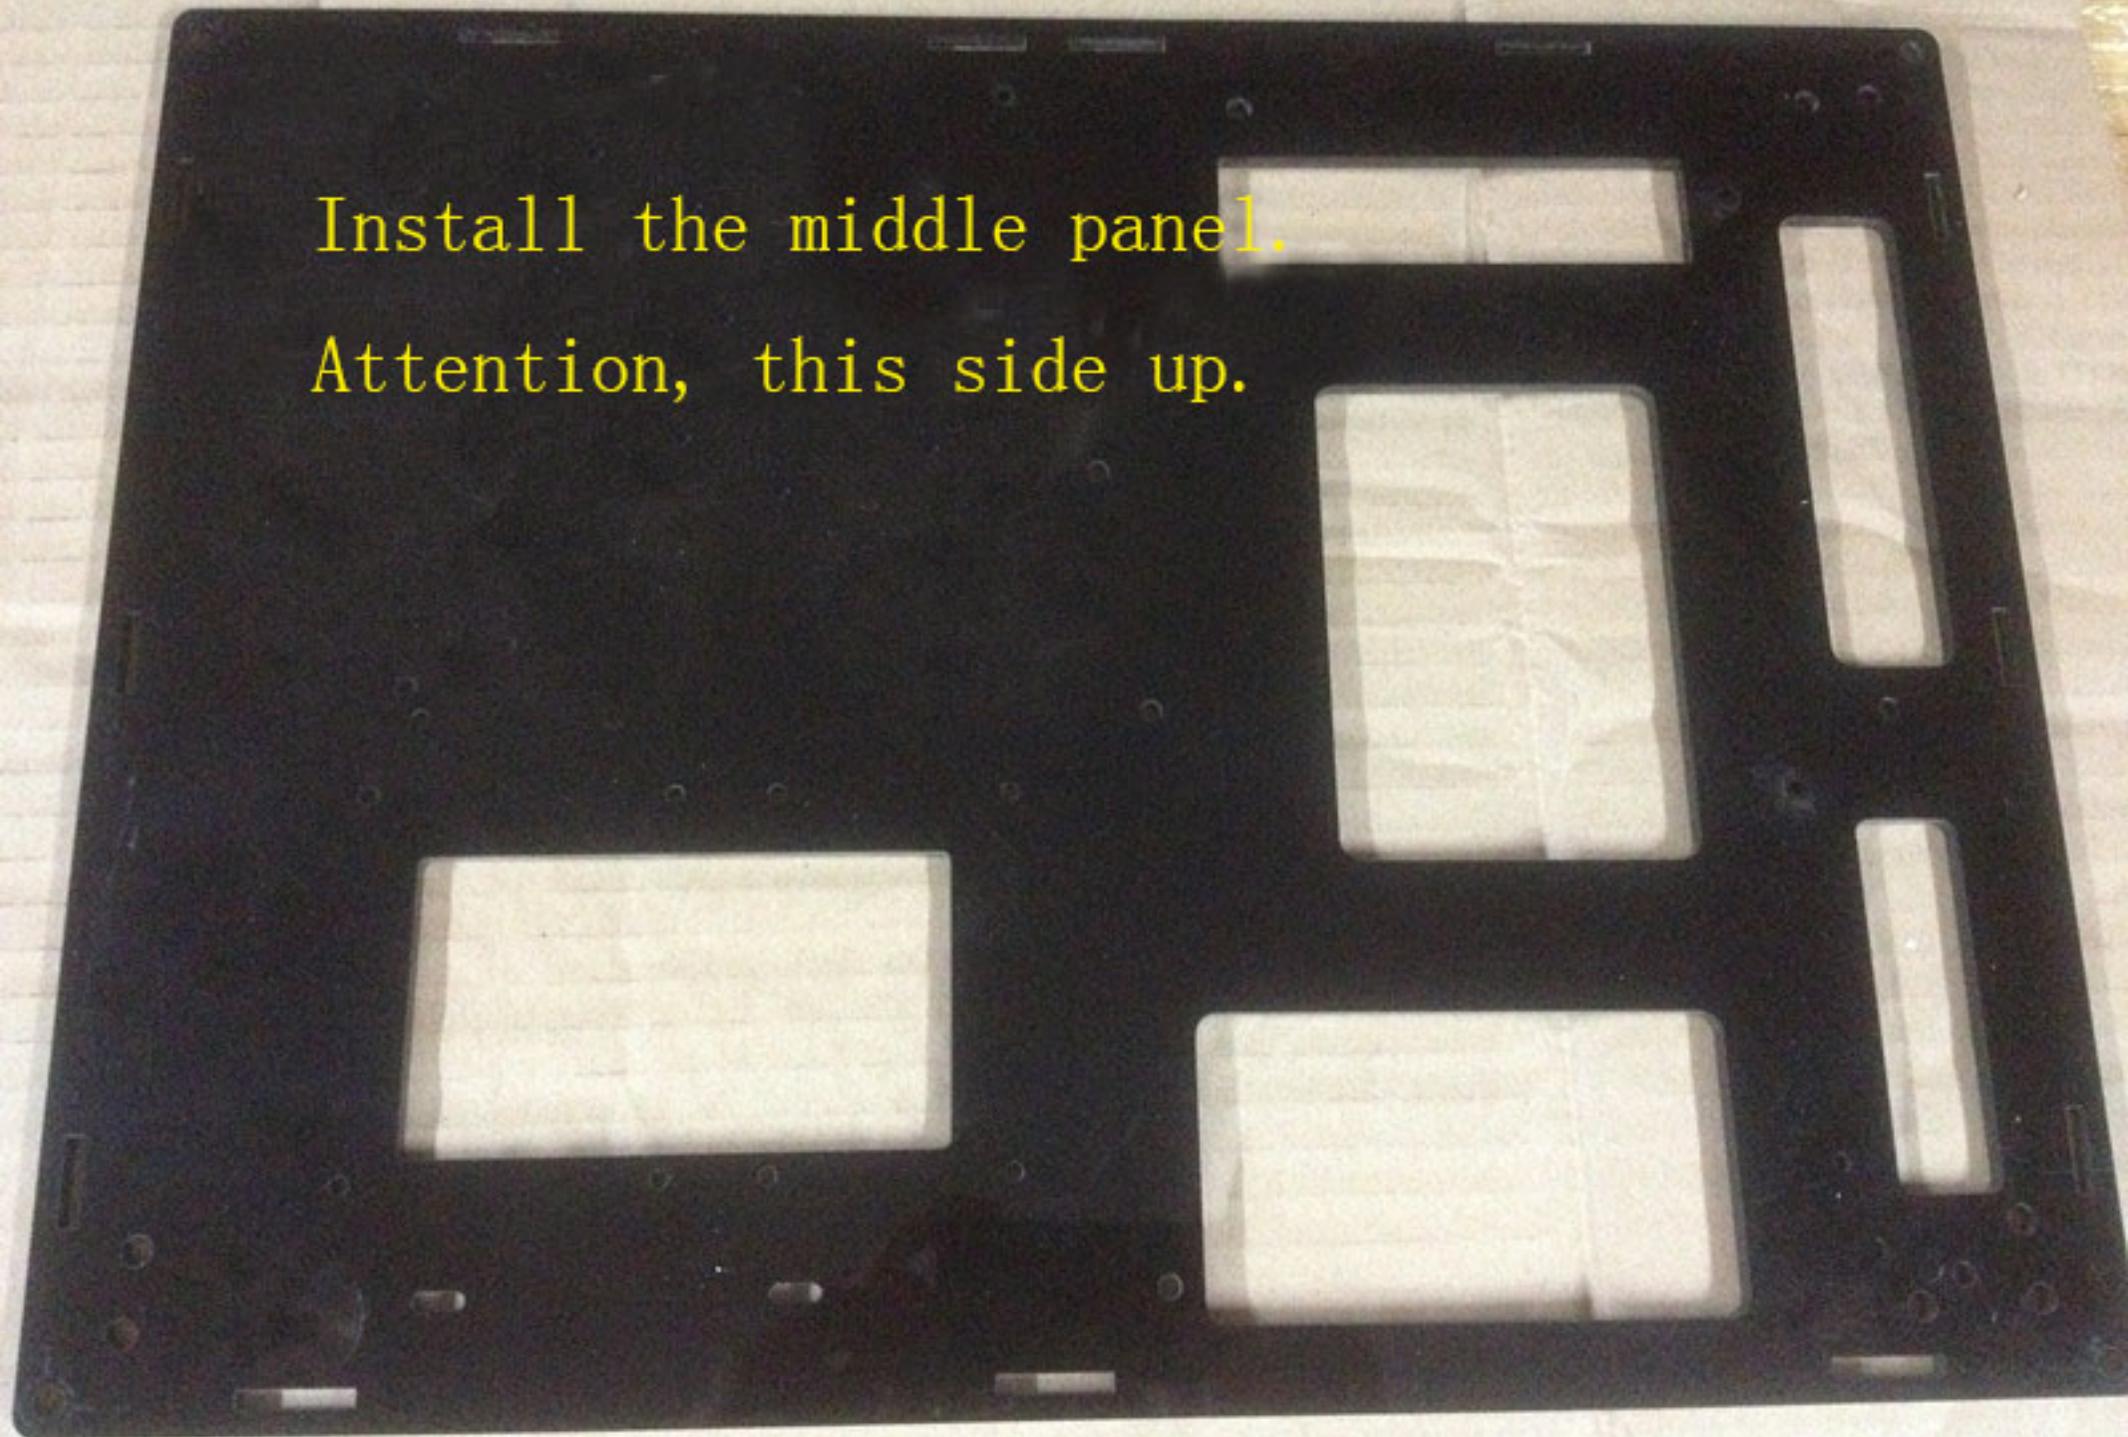


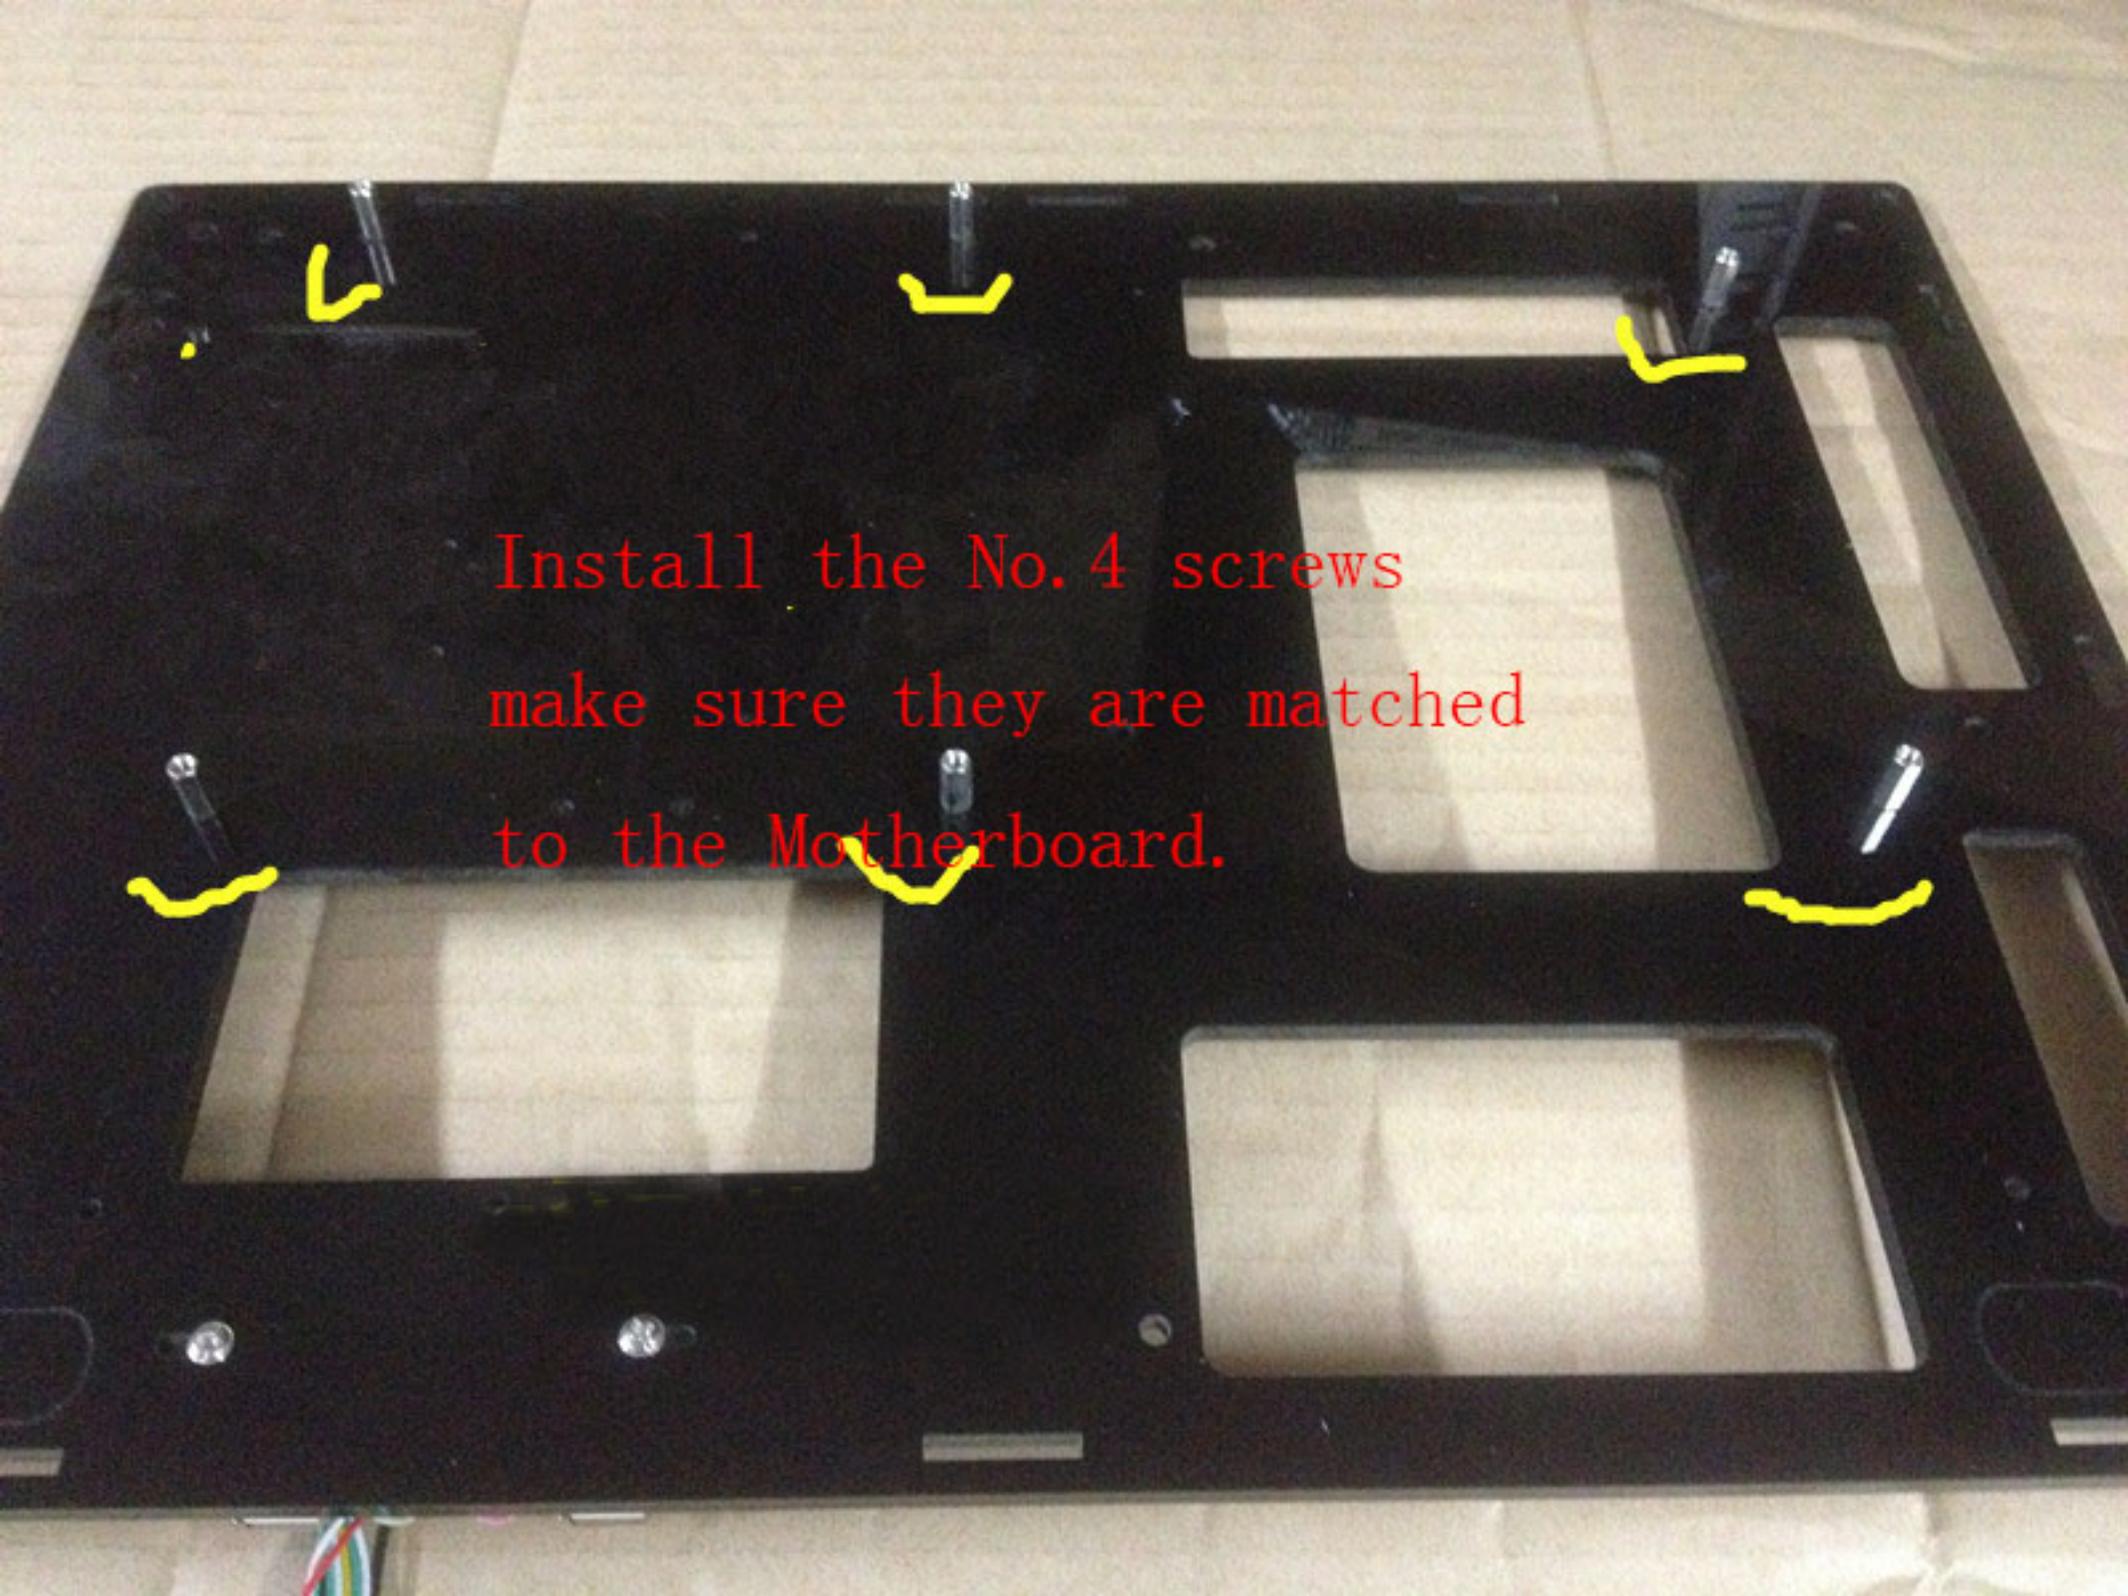

Install the No.4 screws  
make sure they are matched  
to the Motherboard.

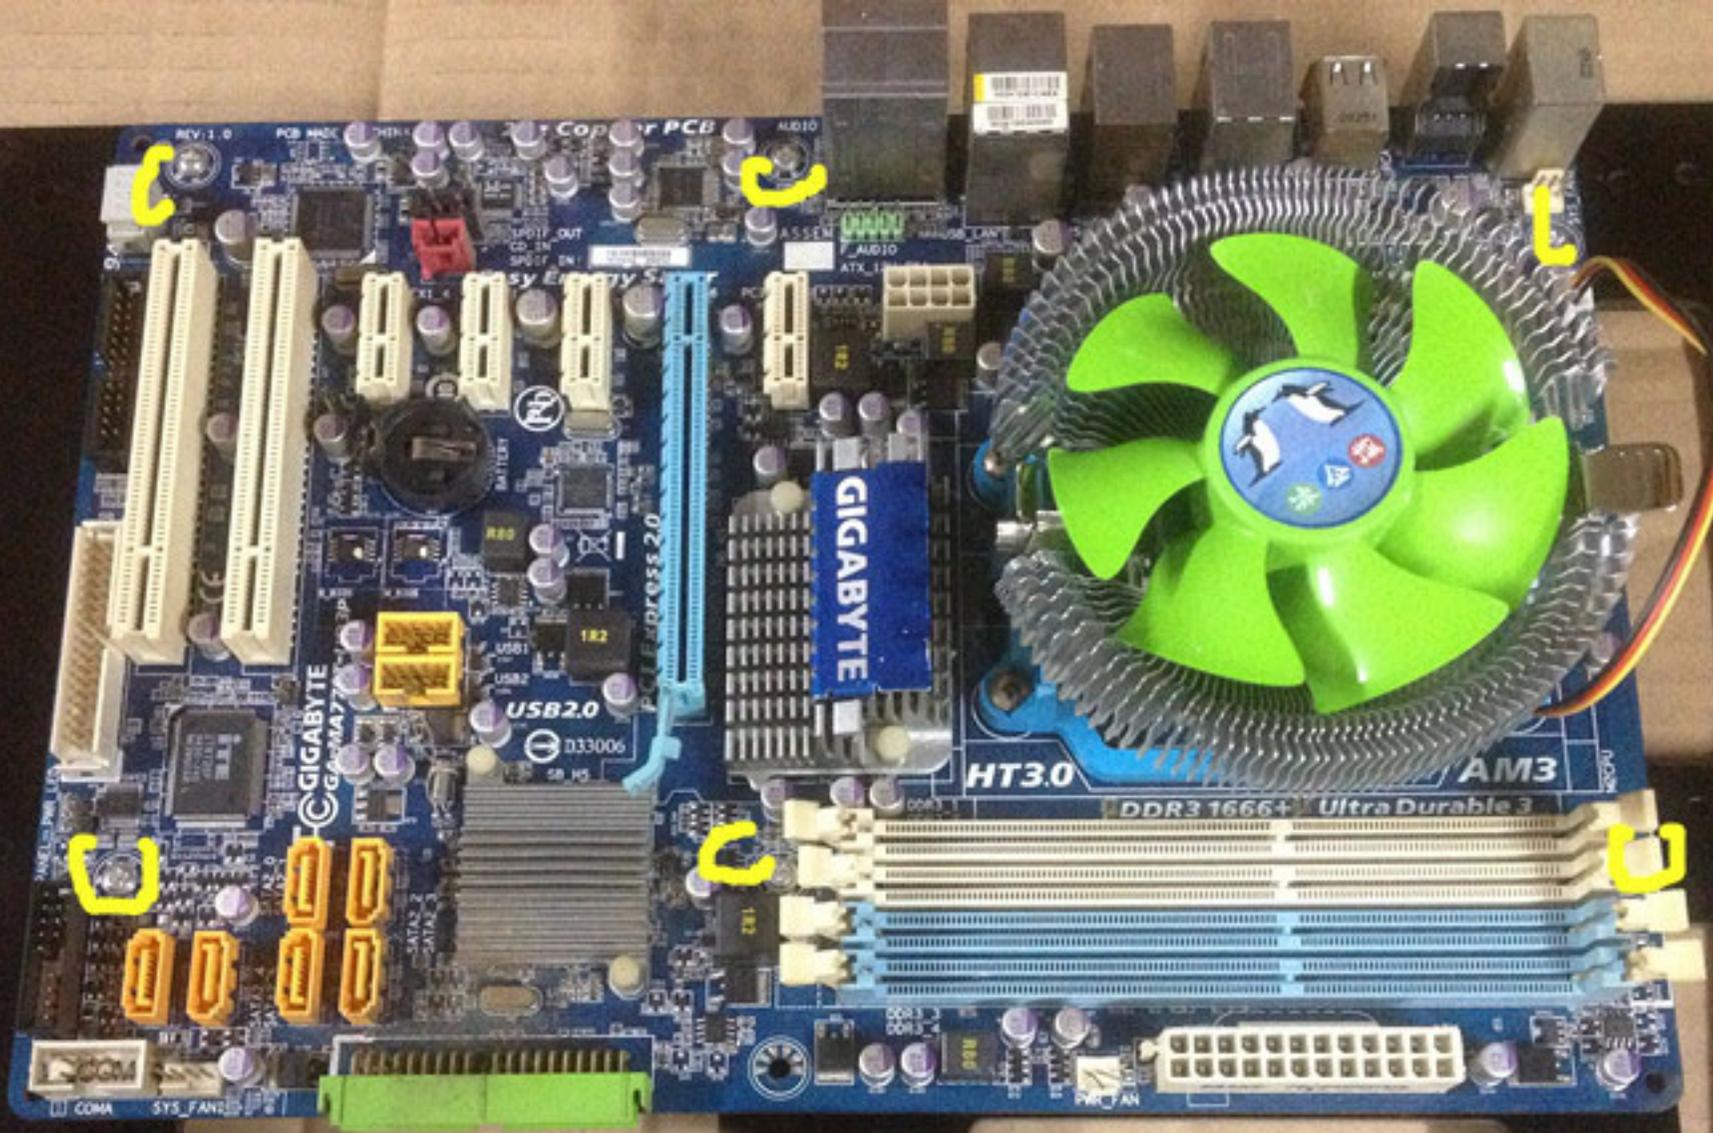

Use No. 2 screws

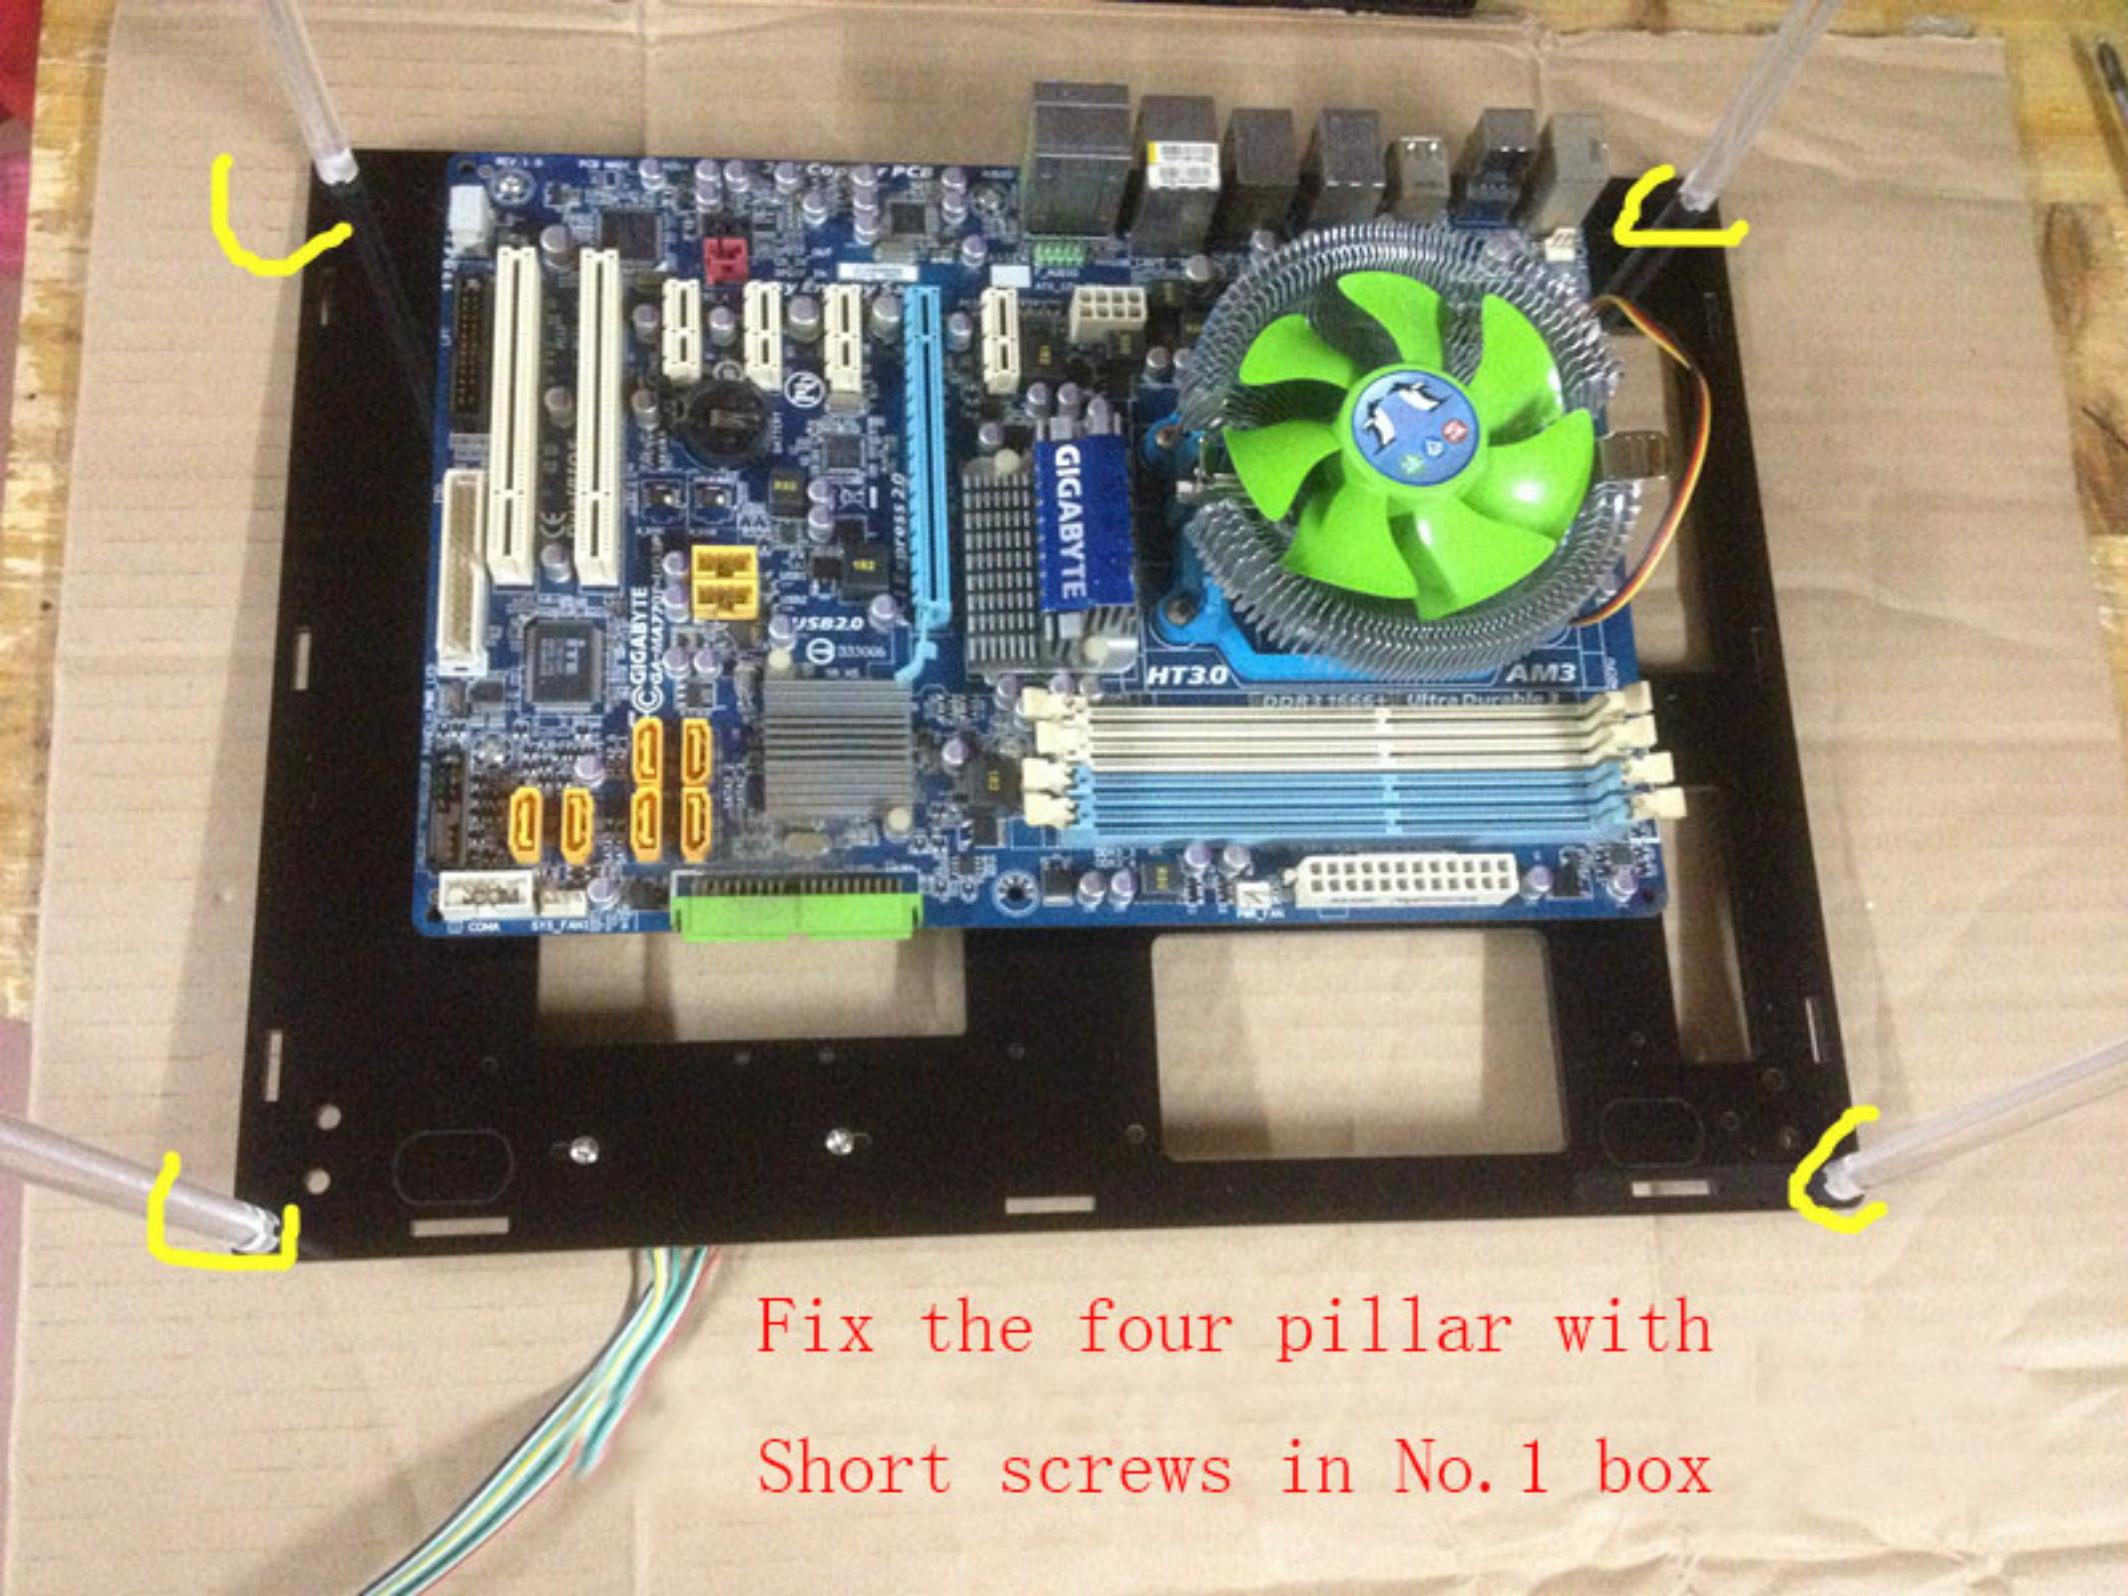


Fix the four pillar with  
Short screws in No.1 box




No. 9 screws.

Flow to the side with label.

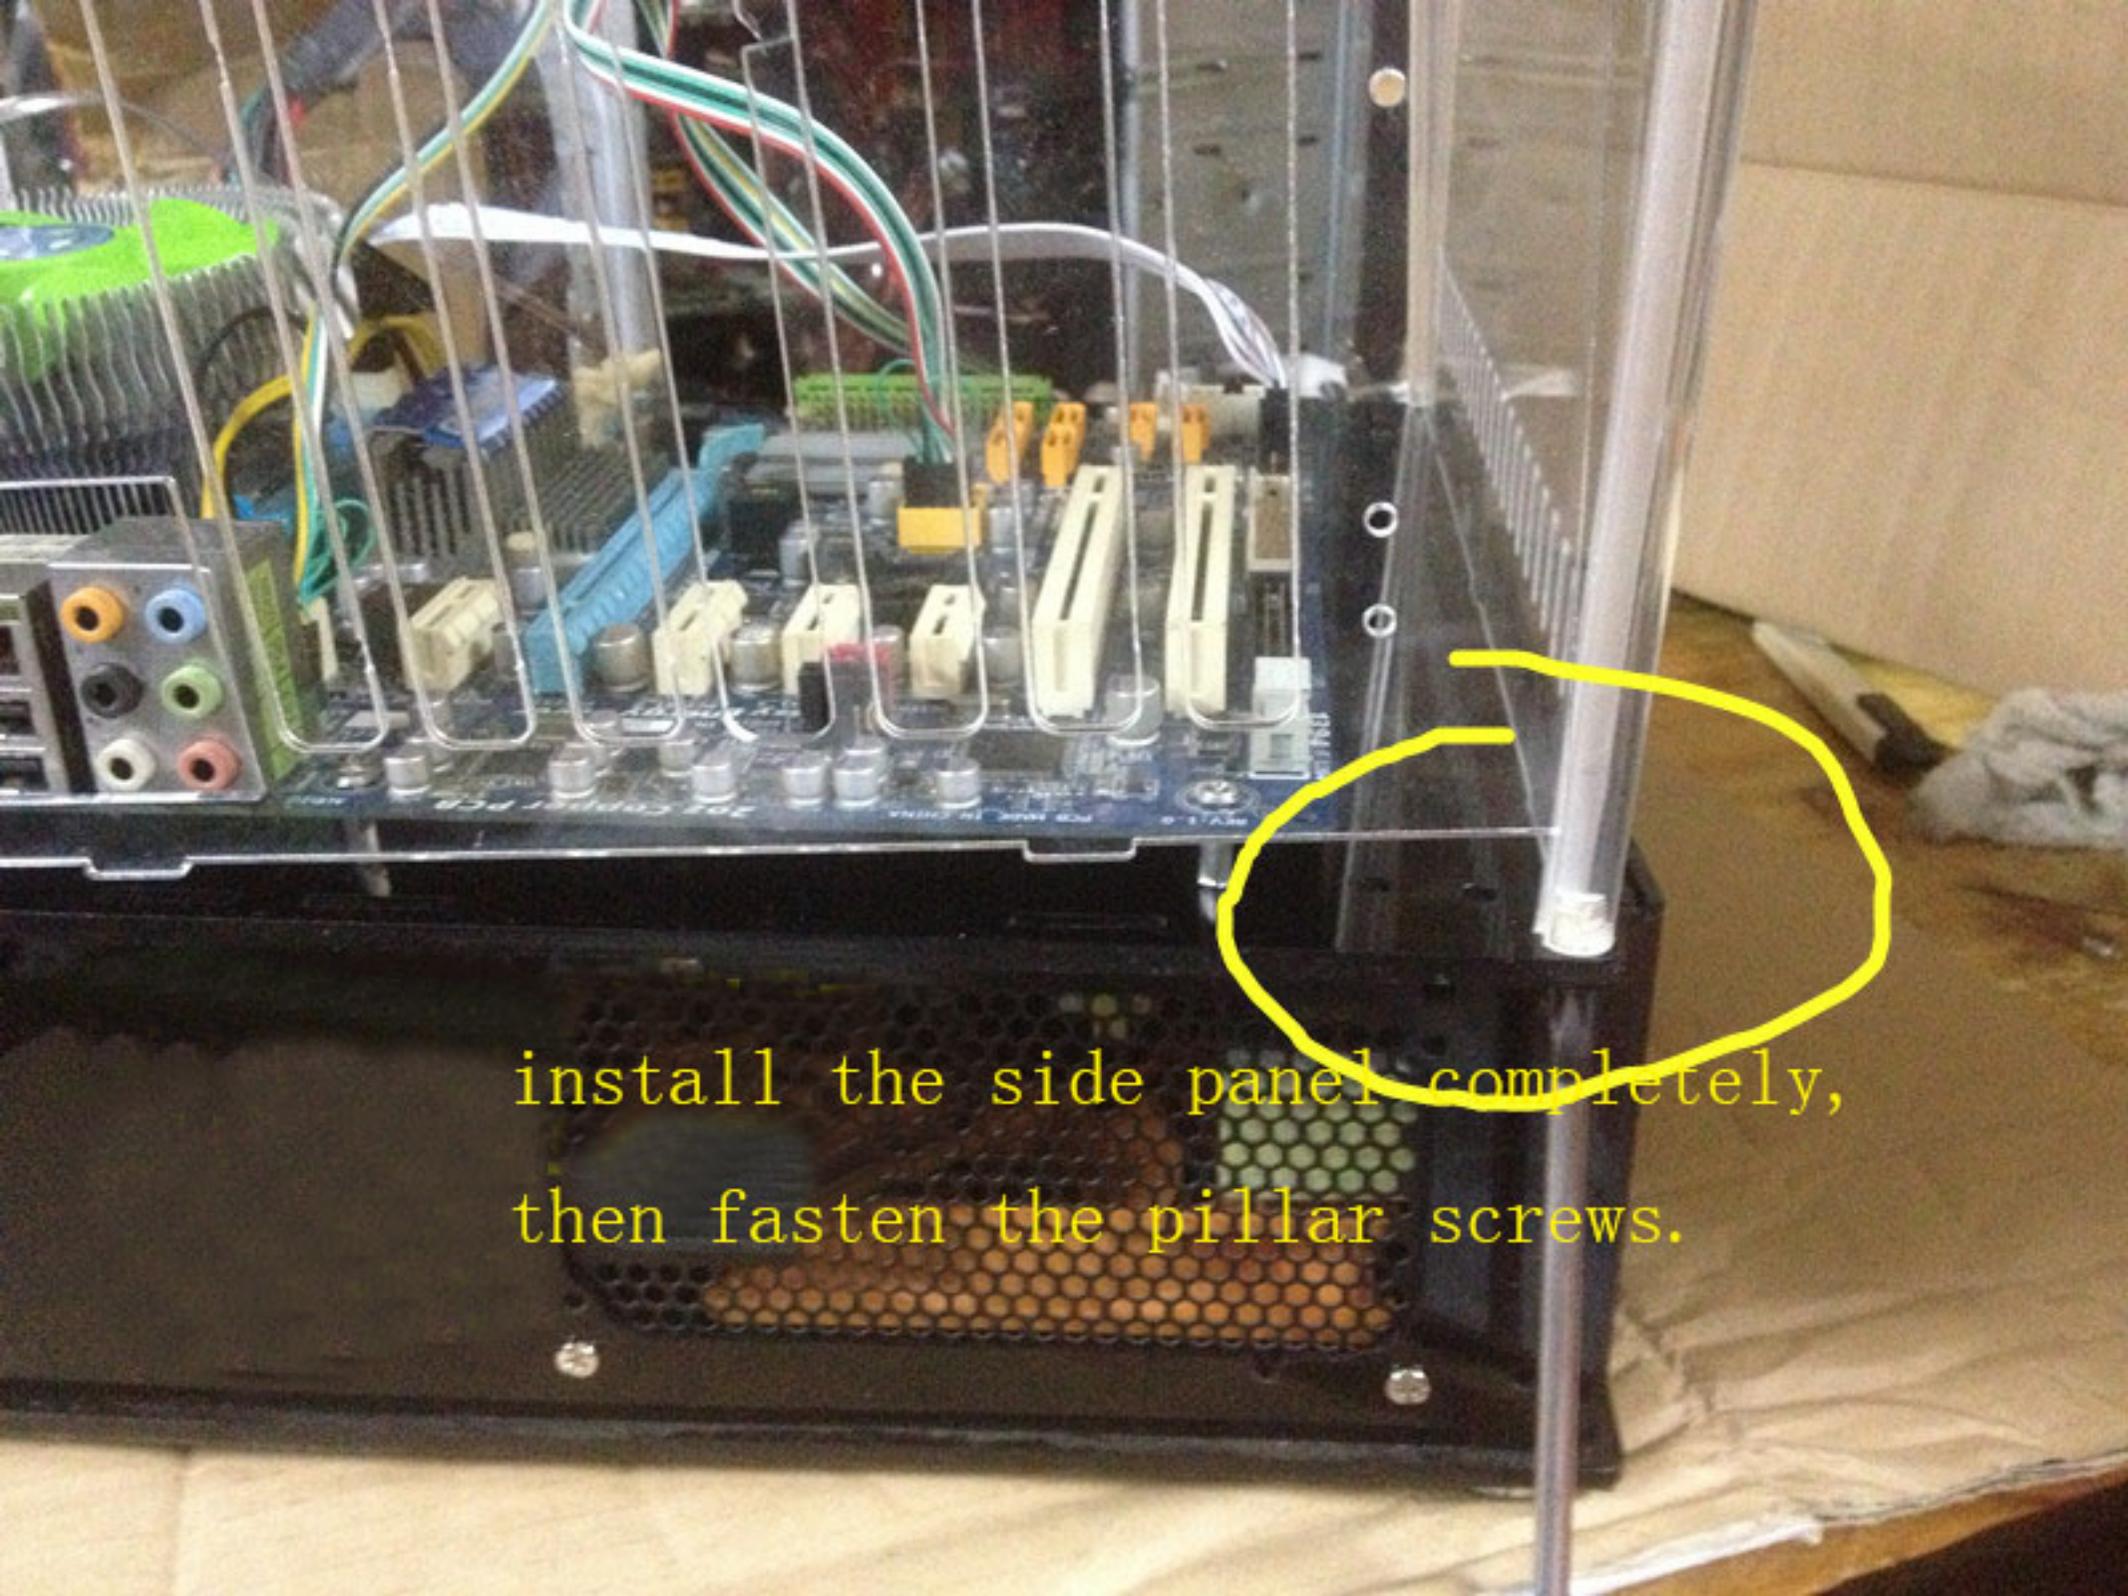


install the side panel completely,  
then fasten the pillar screws.

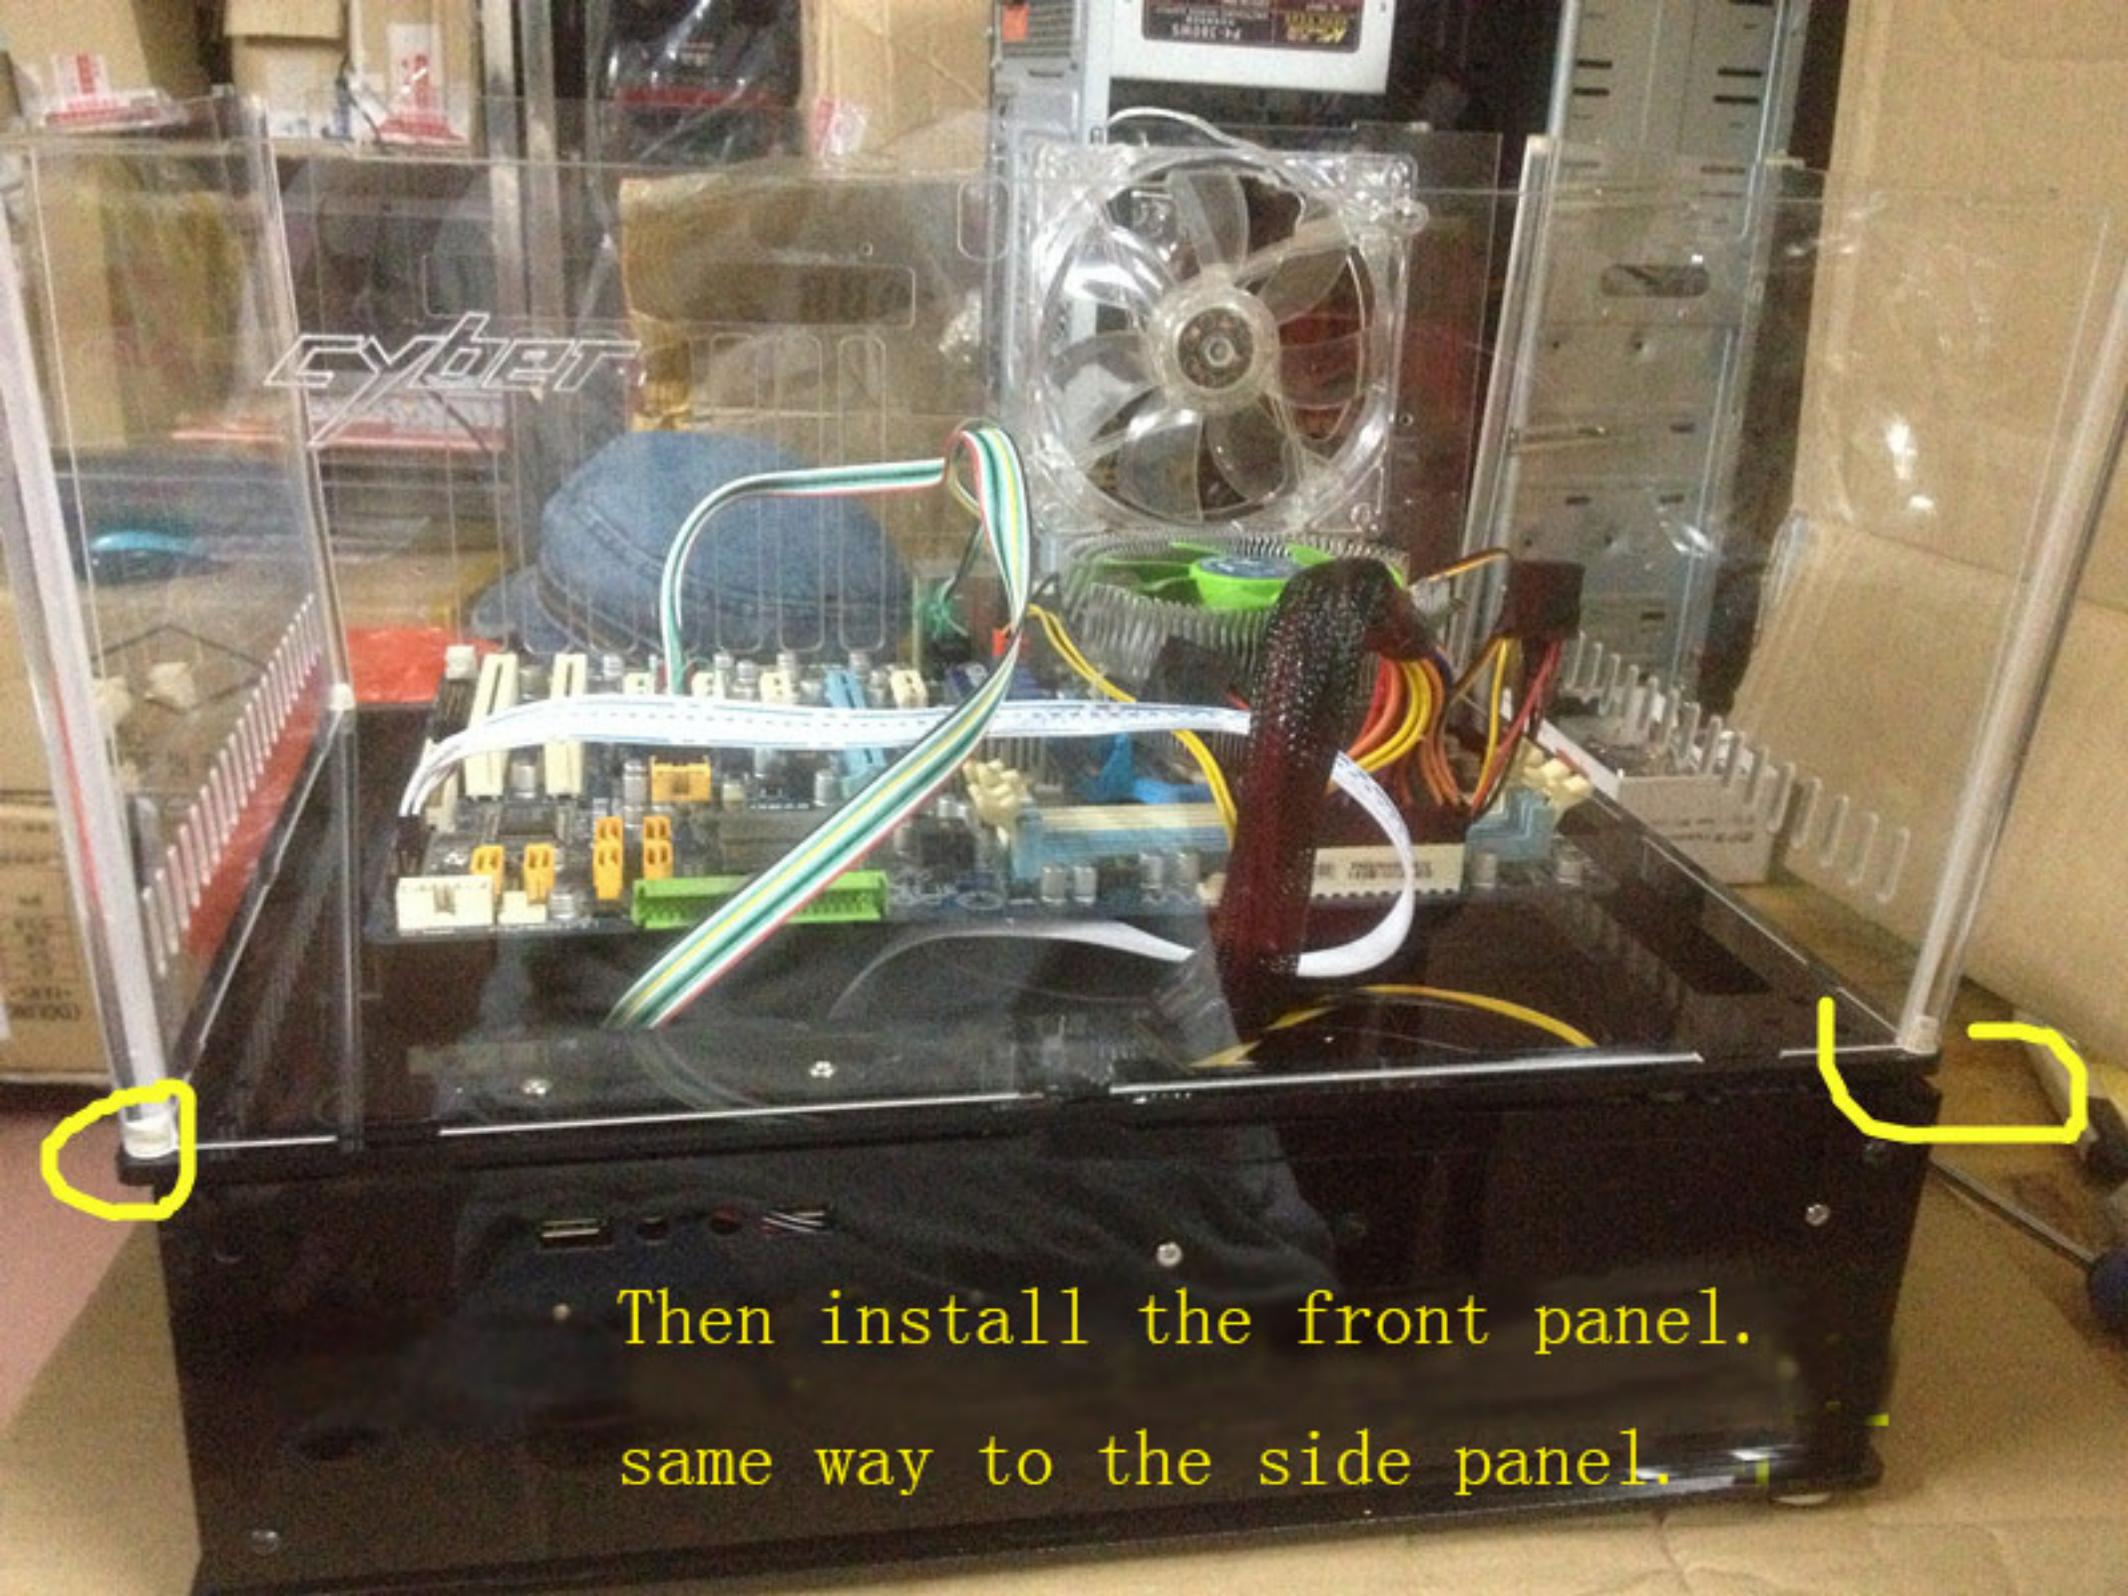

Then install the front panel.  
same way to the side panel.



No. 6 screws

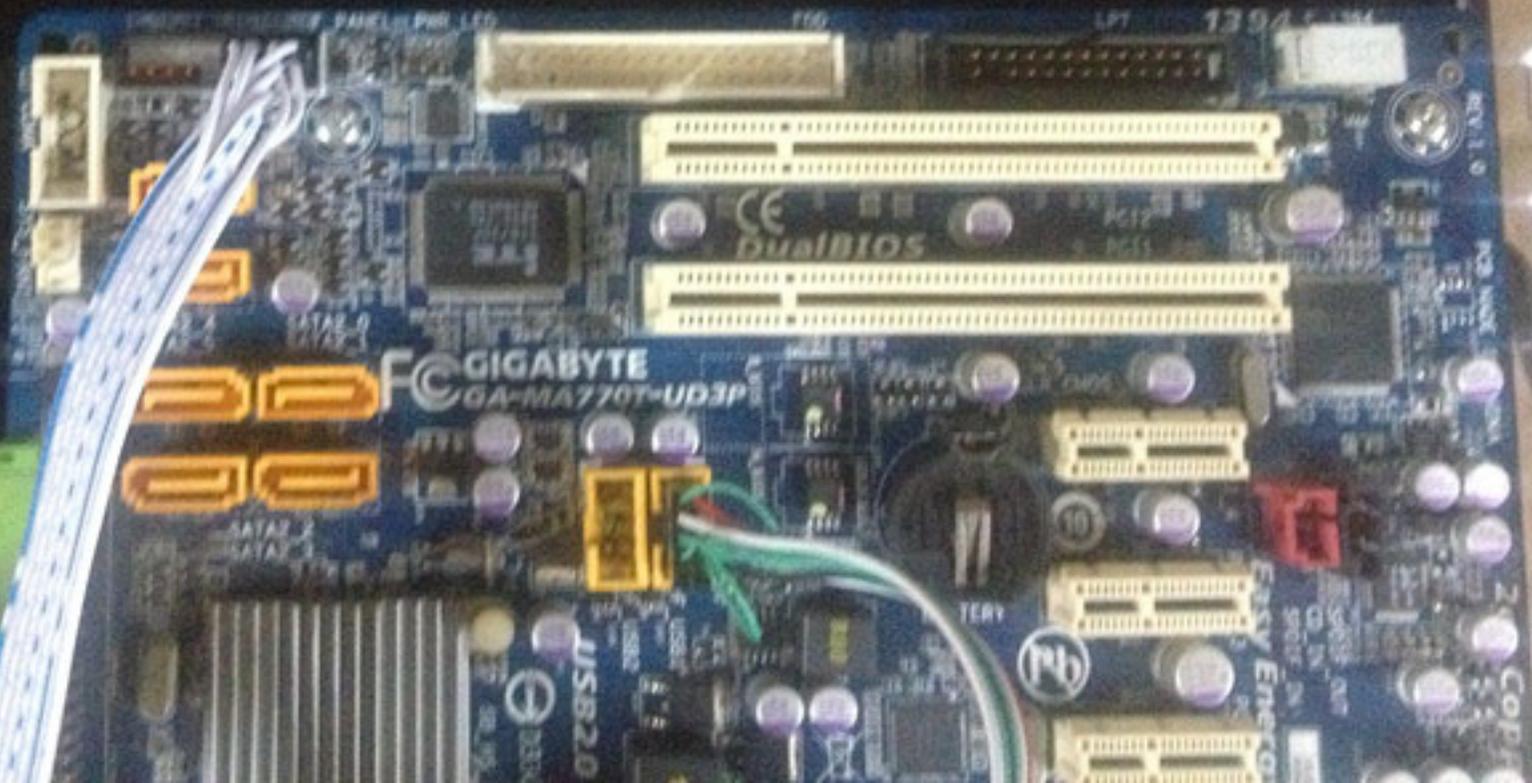



Use No. 6 screws.





Remember the three holes  
on the DVD panel, No. 5 screws.



Install the Graphy card.  
and tie up the cables.

Last step, install the cover pad.

Use the longer screws in No.1 box.

